

Microfiber Autoscrubber Pads Usage Guide

How to Attach Contec's Autoscrubber Pads to Machine



1. Place the autoscrubber pad cleaning side down onto a flat surface.




2. Attach the appropriate Connector pad to the back of the autoscrubber pad.
Note: The Connector pad should be print side up.



3. Attach the paired pads onto the autoscrubber pad driver and secure according to the autoscrubber manufacturer's instructions.



4. Clean surface according to machine and chemical instructions.

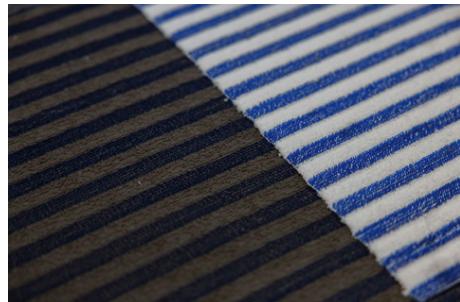

5. Dispose when maximum soil load on cleaning pad is reached. Connector pads can be reused throughout multiple cleaning pad changes.

DISCLAIMER: The following document is intended to serve as a tool to provide documentation of competency only and is in no way providing certification of the information in this document. Facilities should follow their own guidelines, policies and procedures which, in all cases, will take precedence over this training document.